

# SC852 STUMP CUTTER



**CUTTER WHEEL.** As the boom drops from the fully raised position, the cutter wheel moves away from the machine, increasing the maximum cutting width, achieving a cutting height of 31" (78.7 cm) above ground and 25" (63.5 cm) below grade.




**ALL-TERRAIN.** Four-wheel drive with differential lock. With power and torque transferred to each of the four wheels, the SC852 is able to traverse difficult and uneven ground conditions. With the differential locks disengaged, maneuverability is enhanced.



**OPERATOR PRESENCE SYSTEM.** This user-friendly operator system is intended to help protect the operator and enhance operator safety. If the operator's hand(s) leave the cutter wheel controls for more than one second, the cutter wheel will disengage, come to a stop and the cutter wheel indicator light will go out.



**MOVE CHIPS AROUND THE JOBSITE.** The chip blade reduces the need to manually relocate chips. Blade dimensions and ground clearance allow for easy access through narrow gates and travel on uneven terrain, plus the rounded lower edges of the blade help to reduce turf damage.

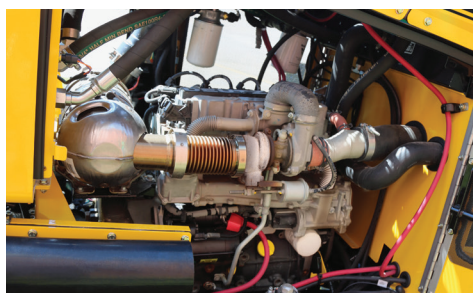

**MAINTENANCE ACCESSIBILITY.** Get easy access to daily service points. Other maintenance areas can be reached easily through hinged doors and removable top hoods.



**PATENTED SMARTSWEEP® CUTTER SYSTEM.** The Vermeer-exclusive SmartSweep® control system is designed to provide faster, easier serviceability, as well as extended pocket and tooth life.



[VERMEER.COM](http://VERMEER.COM)



EQUIPPED TO  
DO MORE.®

